

IP-0101GD

Industrial PSE Media Converter



- 1x Gigabit Ethernet port
- 1x 100/1000F(x) SFP Slot, support either Multi-Mode or Single-Mode
- SFP speed selectable (100 or 1G)
- PD alive (enable by DIP switch)
- Link fail pass-through function
- Built for harsh environments and wide temperature range application
- IP30 housing
-
- DIN-Rail Mounting, Optional Wall Mounting



Specifications

Technology

Standards	IEEE 802.3 10BaseT IEEE 802.3u 100BaseTX IEEE 802.3ab 1000BaseT IEEE 802.3z 1000BaseX IEEE 802.3x Flow Control IEEE 802.3at PoE+
------------------	---

Processing Type	Store and forward
------------------------	-------------------

Interface

RJ45 Port	1x 10/100/1000T(x), auto negotiation speed duplex mode, auto MDI/MDI-X
------------------	--

Fiber Port	1x 100/1000F(x) SFP Slot
-------------------	--------------------------

DIP Switch	Speed: Select SFP 100M or 1000M Enable: PD alive
-------------------	---

PoE Pin Out	V+, V+, V-, V-, for pin 3, 6, 1, 2, Endspan, MDI Mode A
--------------------	---

LED Indicators	Per unit: PWR1, PWR2 Port: TP – Link/Act (Green), PoE (Amber) Fiber – Link (Green)
-----------------------	--

Power Requirements

Operation Voltage	48-57VDC, redundant dual inputs, >50VDC for PoE+ output recommended
--------------------------	---

Connection	1x removable 4-contact terminal block
-------------------	---------------------------------------

Power Consumption	5W without PD load
--------------------------	--------------------

Protection	Overload Current Protected, Reverse Polarity Protected
-------------------	--

Mechanical Construction

Enclosure	SECC
------------------	------

Protection Class	IP30
-------------------------	------

Dimensions	29x140x98 mm (WxHxD)
-------------------	----------------------

Weight	0.6 kg
---------------	--------

Mounting	DIN-Rail Mounting
-----------------	-------------------

Environmental Limits

Operating Temperature	-40°C ~ 75°C (-40°F ~ 167°F)
------------------------------	------------------------------

Storage Temperature	-40°C ~ 85°C
----------------------------	--------------

Ambient Relative Humidity	5 to 95%, (Non-Condensing)
----------------------------------	----------------------------

Regulatory Approvals

EMI	FCC Part 15 Subpart B Class A CE EN 55032 Class A
------------	--


EMS	IEC61000-4-2 (ESD) IEC61000-4-3 (RS) IEC61000-4-4 (EFT) IEC61000-4-5 (Surge) IEC61000-4-6 (CS)
------------	--

	IEC61000-4-8 (Magnetic Field)
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant

Certifications	IEC 61000-6-2 IEC 61000-6-4
MTBF	>100,000 hours
Warranty	5 Years

Features with star(*) implies those are under development.
In a continuing effort of improvement and updated technology, product specifications are subject to change without notice.

Dimensions (unit = mm)

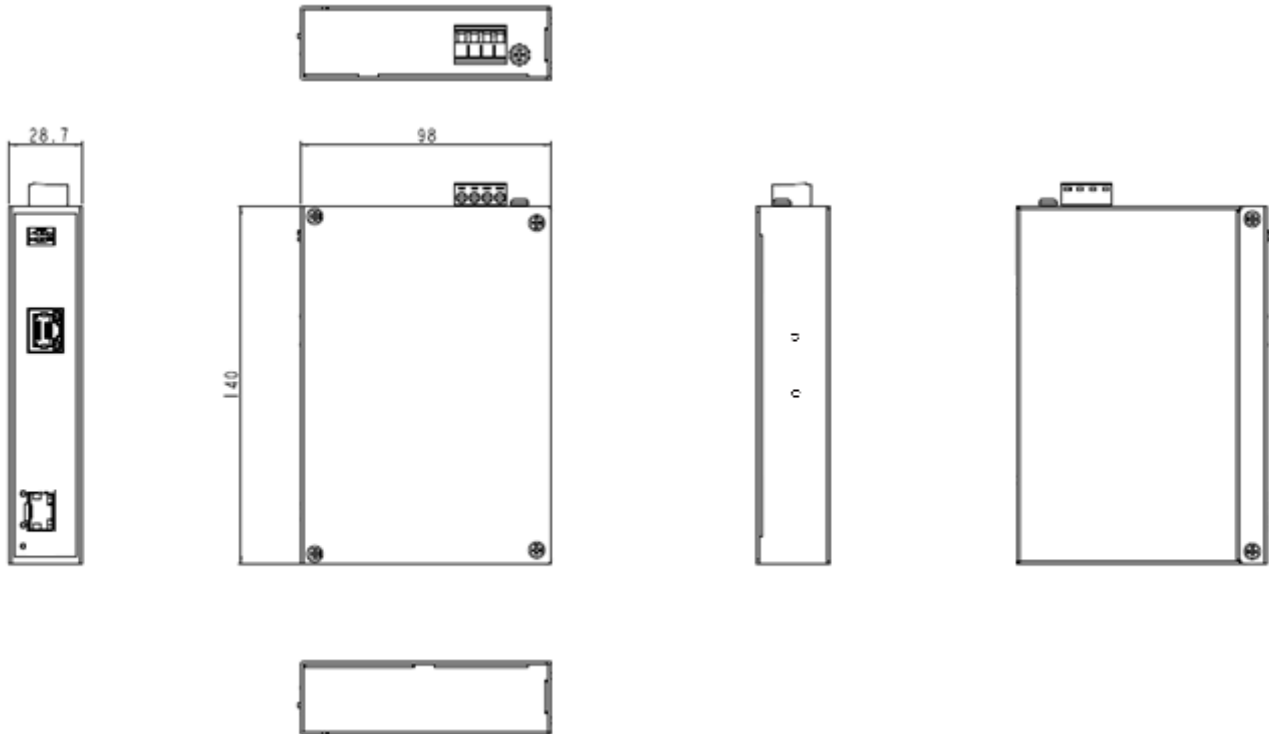

Ordering Information

IP-0101GD

Industrial PoE Media Converter
 - 1x 10/100/1000T(x) + 1x 100/1000F(x) SFP Slot
 - Operating Temperature: -40°C ~ 75°C (-40°F ~ 167°F)

Optional Accessories

NDR-75-48 75W Industrial DIN-Rail Power Supply, 48VDC (metal case)